




Velike staklene površine
za sve vrste objekata

SSI 128

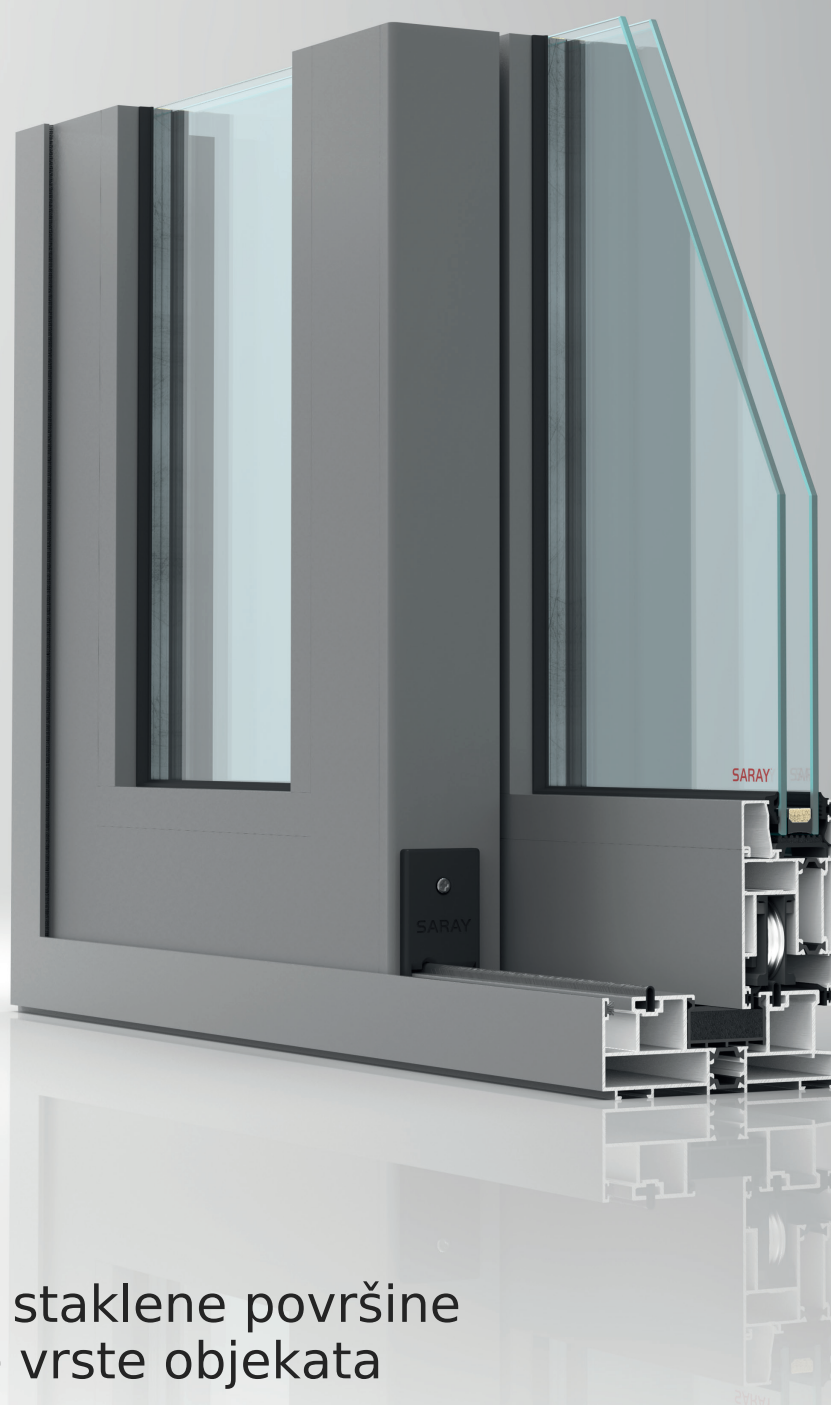

SSI 128 pruža izuzetnu toplotnu izolaciju zahvaljujući poliamidnom termičkom prekidu širine 20 mm i EPDM zaptivkama. U okviru porodice kliznih sistema sa termičkim prekidom, posebno je pogodan za izgradnju vila.

Podizno-klizni sistem SSI 128 ima dubinu rama od 128 mm. Različite varijante ramova sa jednom, dve ili tri šine omogućavaju izradu kliznih konstrukcija sa do šest pokretnih krila.

Nosivost pojedinačnog krila iznosi do 400 kg, uz mogućnost ugradnje stakla debljine do 34 mm. Sistem je kompatibilan sa različitim markama i vrstama okova i omogućava zaključavanje u više tačaka.

Zahvaljujući arhitektonskom dizajnu ravnih linija, SSI 128 predstavlja posebnu seriju pogodnu za primenu na različitim vrstama objekata.

SSI 128 provides exceptional thermal insulation through its 20 mm polyamide thermal barrier and EPDM gaskets. Within the thermally insulated sliding systems range, it is particularly suitable for villa-type buildings.

The SSI 128 Lift & Slide system has a frame depth of 128 mm. Single, double and triple rail frame options allow sliding configurations with up to six movable sash panels.

Each sash supports up to 400 kg and glazing up to 34 mm thick. The system is compatible with different brands and types of hardware and allows multi-point locking.

With its straight-line architectural design, SSI 128 is a special series suitable for use in various building types.






TEHNIČKE KARAKTERISTIKE - TECHNICAL PROPERTIES

Dubina rama	Frame depth	128 mm
Vidljiva širina - fiksni deo	Visible width - fixed	44 mm
Vidljiva širina - krilo	Visible width - sash	101 mm
Dubina krila	Sash depth	55 mm
Dubina srednjeg spoja	Middle section depth	67 mm
Minimalna debljina stakla	Min. glazing thickness	20 mm
Maksimalna debljina stakla	Max. glazing thickness	34 mm
Maksimalne dimenzije krila	Max. sash dimensions	3000 x 2700 mm
Maksimalna masa krila	Max. sash weight	300 kg

PERFORMANSE - PERFORMANCE VALUES

	TS EN 12207	Propustljivost vazduha	Air permeability	NA
	TS EN 12208	Vodonepropusnost	Water tightness	NA
	TS EN 12210	Otpornost na opterećenje vetrom	Wind load resistance	NA
	TS EN 12210	Sigurnosno opterećenje vetrom	Safety wind load resistance	NA

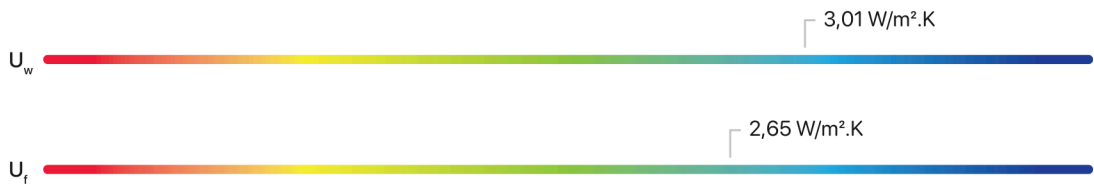

Proračun je izvršen sa staklom koeficijenta Ug = 1,0 W/m².K.
Calculation based on glazing with a Ug value of 1.0 W/m².K.

TEHNIČKI CRTEŽI - TECHNICAL DRAWINGS

